

坤巨資訊股份有限公司
GROOVY TECHNOLOGY CORP.

SPECIFICATIONS OF TOUCH CONTROLLER

觸控面板控制器標準規範書

Date(日期): 2004/12/23

Customer(客戶):

Model(型式): ET-1232F

Mode(種類):


Customer Approval(客戶確認)

Customer Approval(客戶確認)

Approve(確認)	Checked(審閱)	Preparation(製表)

GROOVY TECHNOLOGY CORP.
2F,NO.2,LANE 252,SEC.3,CHUNG GHING N. ROAD
N.ROAD,TAIPEI,TAIWAN
TEL : 02-25952775 FAX : 02-25949489
EMAIL : groovy@seed.net.tw
http : //www.gtouch.com.tw


坤巨資訊股份有限公司
台北市重慶北路三段 252 巷 2 號 2 樓
電話 : 02-25952775 傳真 : 02-25949489
EMAIL : groovy@seed.net.tw
網址 : http : //www.gtouch.com.tw

ET-1232F	SPECIFICATIONS		
ITEM			
OVERVIEW	<p>ET-1232F supports mainly 5-wire analog resistive touch panel. It could imitate mouse function by getting touch function via RS-232 port to connect PC. Moreover, it could be installed general OS (e.g. Windows or Linux) for matching common request. If customers need to developing formula on their own, we also could provide necessary protocol.</p>		
Interface	Serial RS-232		
Touch Resolution	Above 2048 X 2048		
Response time	Max. 35 ms		
Supply Voltage	Derived from PS/2 port		
Power consumption	Active : 36mA		
Operation Temperature	0 ~ 70°C 10% to 90% RH, non-condensing		
Storage Temperature	-30°C ~ 85°C 10% to 90% RH, non-condensing		
LED	Touch/Untouch indication		
Dimension	PCB:2.71" X 1.18"(69mm x 30mm)		
	CASE: 3.11" X 1.50"(79mm x 38mm)		

ET-1232F

SPECIFICATIONS

- Total Width: 30 mm
- Total Length:69 mm(including connectors)

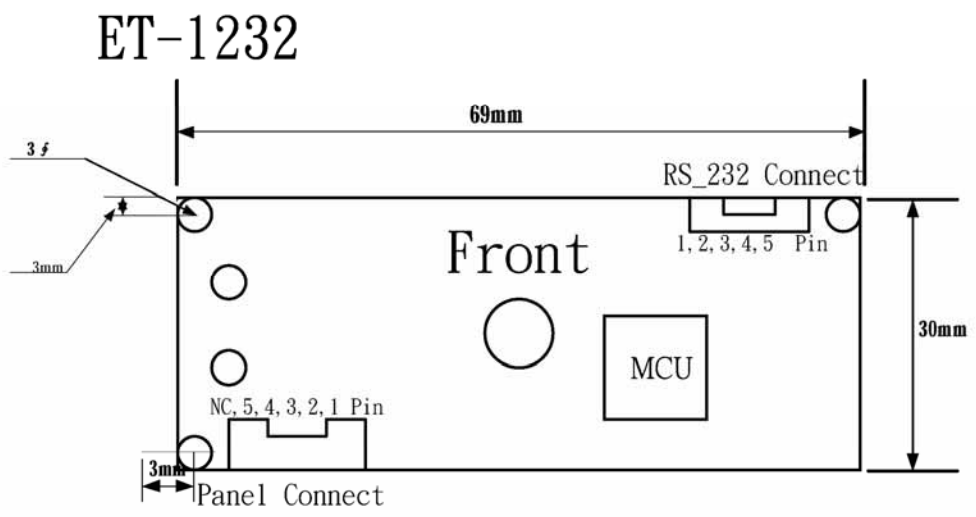

ET-1232F

SPECIFICATIONS

Connect1 : UL(Y+) LL(X+) WIPPER UR(X-) LR(Y-)

-