

# GSW Series -

Surface Acoustic Wave Touch Screen



## THE GSW SERIES (SURFACE ACOUSTIC WAVE) TOUCH SCREEN

has high transmission (> 90%), high stability and durability characteristics, and compared to other pure glass technology has a lower price, suitable for indoor and require high-intensity occasions.

### APPLICATION

- POS
- ATM
- Ticket Machine
- Gaming


### TECHNICAL

Touch Panel

Standard: Sizes from 8.4" to 24"

Controller

USB / RS-232 / Combo

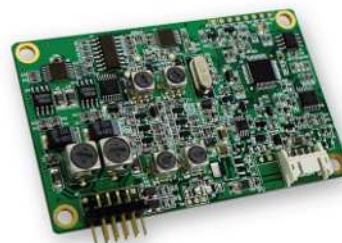


# GSW Series -

## Surface Acoustic Wave Touch Screen

### CHARACTERISTICS

- High Transparency. 90%
- High Hardness Glass 7H
- High Reaction Sensitivity
- Long lifetime for 5 year warranty

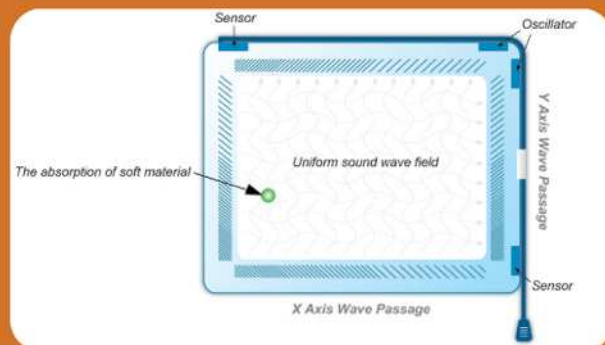

### SPECIFICATION

	Standard
Input Mode	Finger or Soft Material
Storage Temperature	-40°C~70°C
Operating Temperature	-20°C~50°C
Transparency	90% ↑
Accuracy	< 2 mm
Hardness	7H
Knock Test	50,000,000 times
Operating Force	85g
Glass Substrate	3 / 4 / 6 mm
Controller Resolution	4096 * 4096
Controller Interface	Combo
Warranty	5 year

### GROOVY TECHNOLOGY CORP.

www.gtouch.com.tw

Head Quarter

TEL: +886-2-26562589 FAX: +886-2-26578282

3F, No.9, Alley 2, Lane 35, Jihu Rd., Neihu District, Taipei City 114, Taiwan

### GROOVY (SHENZHEN) INDUSTRIAL CORP.

Branch Office

TEL: +86-755-83687759

FAX: +86-755-25327085

Room 1505, 15F, World Trade Piazza, FuHong Rd., Futian District, ShenZhen City, China

