

1. TOUCH PANEL PIN ASSIGNMENT

1	YU	Glass Terminal
2	XR	Film Terminal
3	YL	Glass Terminal
4	XL	Film Terminal




2. MATERIAL CHARACTERISTICS

Property	Requirement
Surface treatment	Anti-Glare
Bottom glass thickness	1.1mm
Light transmission	78%
Operation temperature	-20~70 °C
Storage temperature	-20~70 °C
Operating Humidity	20~90%RH
Storage Humidity	20~90%RH
Surface hardness	≥2H

3. ELECTRICAL CHARACTERISTICS

Property	Requirement
Type	Analog resistive 4 wire
Linearity	Max. 1.5%
X(2,4) resistance	280 ~ 910 Ω
Y(1,3) resistance	200 ~ 420 Ω
Insulation resistance	MIN. 20 MΩ (DC 25V)

4. Tolerance no specified: ±0.3mm

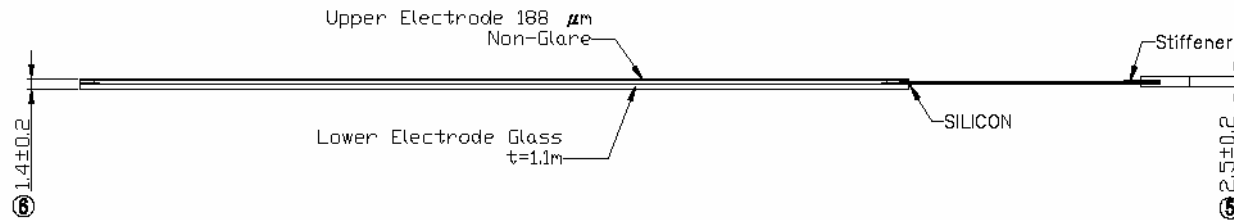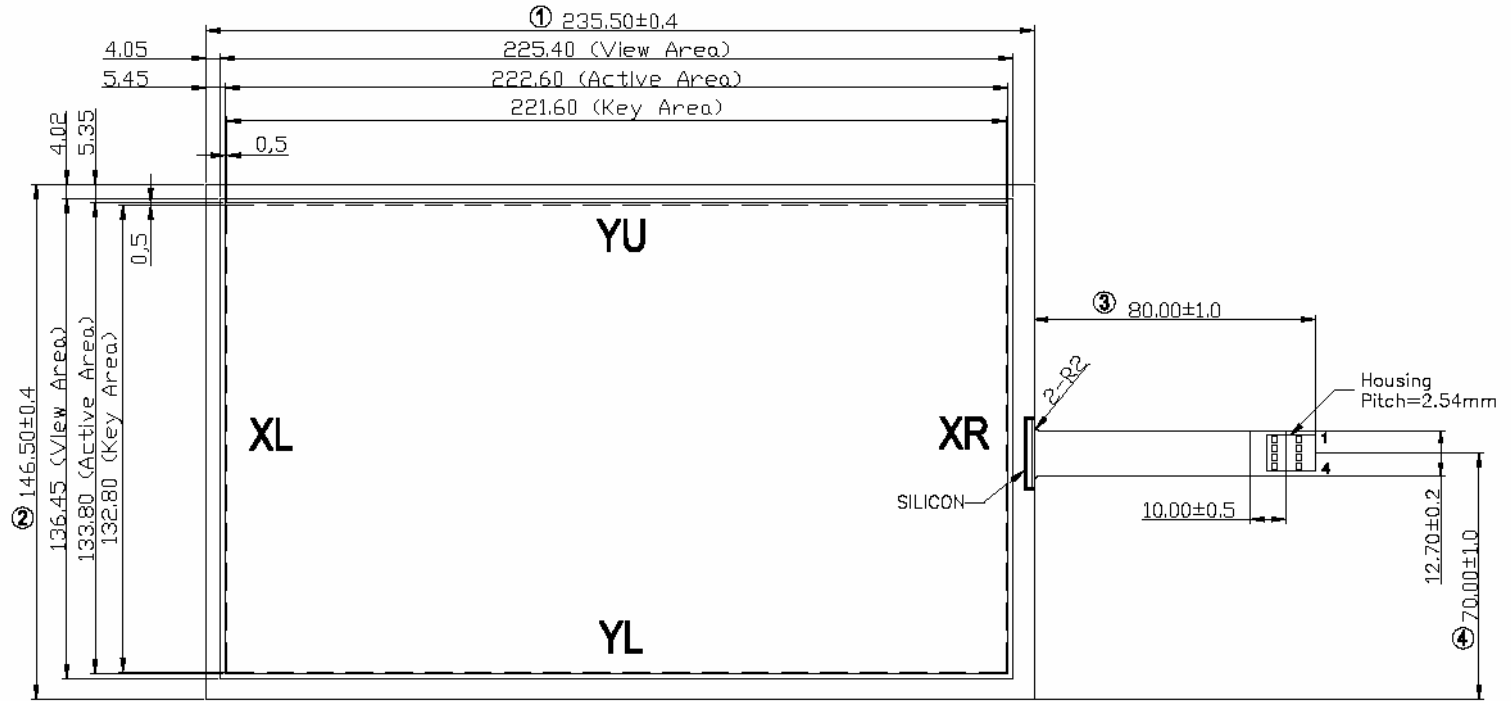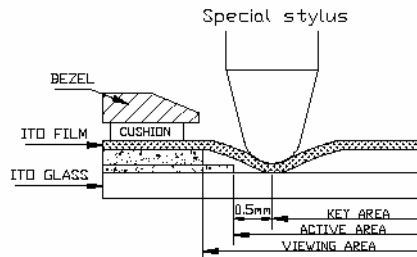

MODEL	GP-102F-4S-01A	TYPE	Analog Resistive	DATE	2006.06.27
UNIT	mm.	NO		CUSTOMER	
DRAWING	Daniel	NOTE	Four-Wire	APPROVED	

