



Edition	Modify	Date	Author
A1	粘线方式更改	09-4-21	

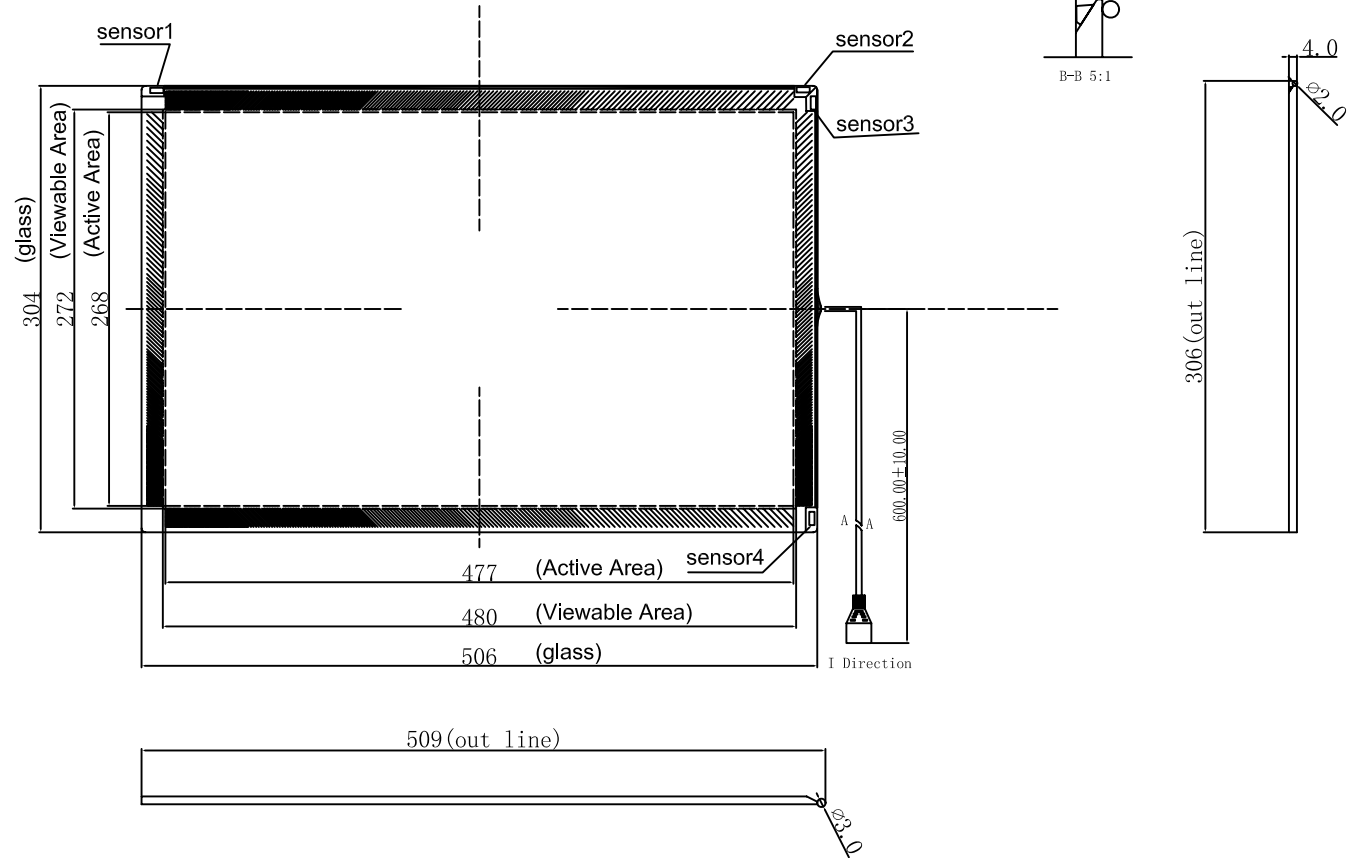

I Direction		
PIN	Signal	Insulation Color Overall Shield
1	Oierall Shield	
2		
3	Y + Receive	BLUE
4	Y Transmit	BLUE
5	Y - Receive	BLACK
6	Y Ground	YELLOW
7	Shield	
8	X Ground	GREEN
9	X+Receive	WHITE
10	X Transmit	RED
11	X-Receive	RED
12		

sensor 1	Y-Transmit
sensor 2	Y-Receive
sensor 3	X-Receive
sensor 4	X-Transmit

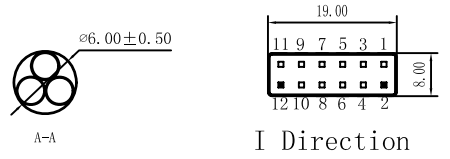

备注:  
 1. 线卡:常规  
 1. 换能器:15.5mm  
 3. 粘线方式:侧面

Unmarked Tolerance			Groovy (shenzhen) Industrial Co.,Ltd					
From (mm)	To (mm)	Quality level	product	规格书	Drawing No.			
0	10	±0.05	Specs		Part No.		GP-215F-SK-GA01A	
10	50	±0.10	Drawing/Date	09.4.21	Edition	A1	Unit	mm
50	100	±0.15	Check/Date		Size	A4	Scale	Free
100以上		±0.50	Approve/Date		Shadow			
			Total X 1 P X 1 P					